



Flamco



Manual Flamcomix

Thermostatic Mixing Valve
Thermostatisches Mischventil
Mitigeur thermostatique
Thermostatisch mengventiel



A
Flamcomix
• Max. 100 °C



B
Flamcomix
Back Flow Preventer
• Max. 90 °C



C
Flamcomix
High Capacity
• Max. 90 °C




Insulation Box







Back Flow
Preventer set

Connection set
picture

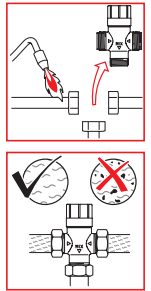












Connection set



A/B



C






Flamco



A/B



C

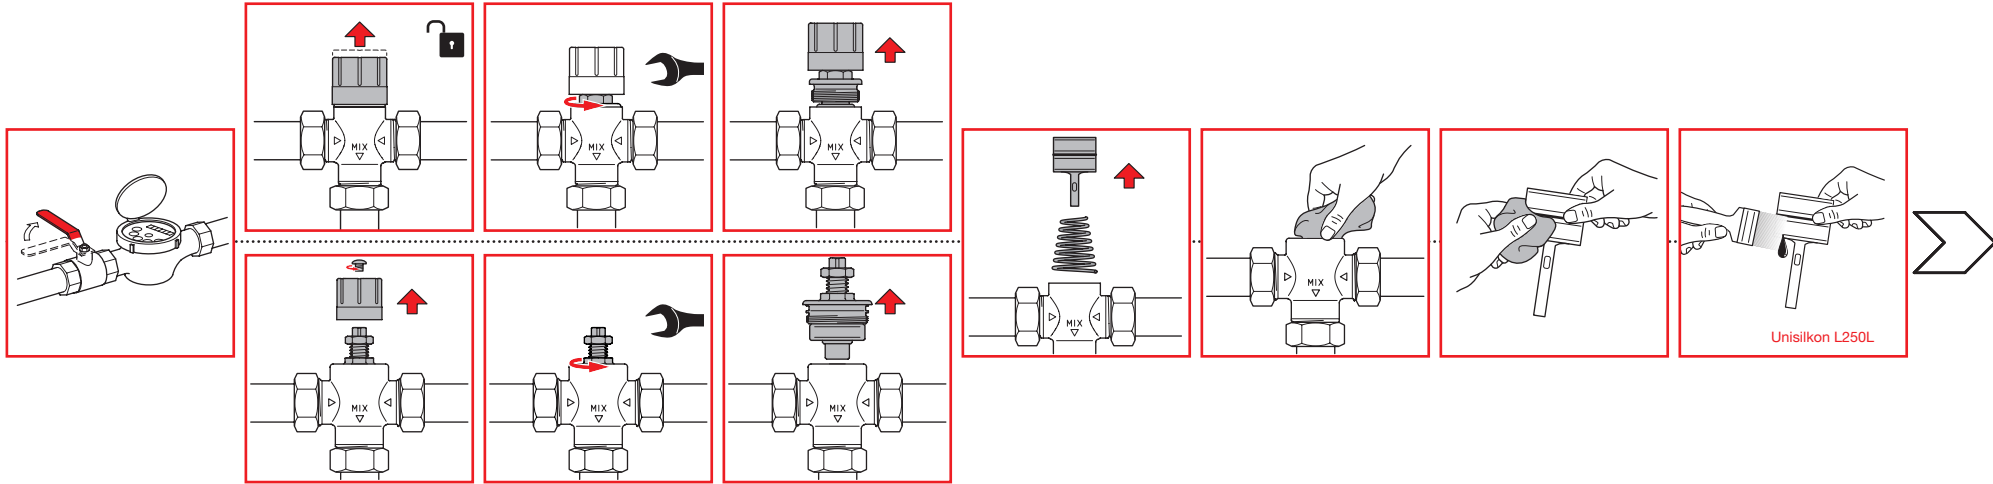

Unisilikon L250L

A/B



C

